
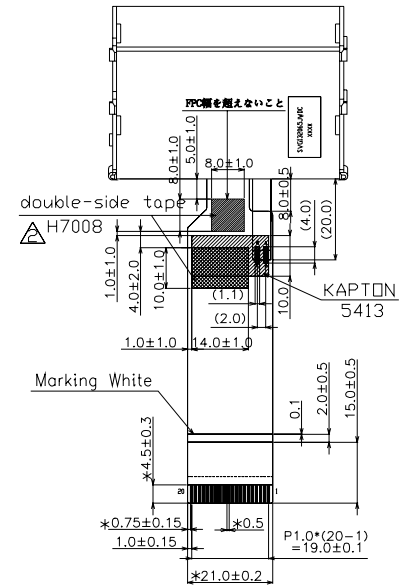
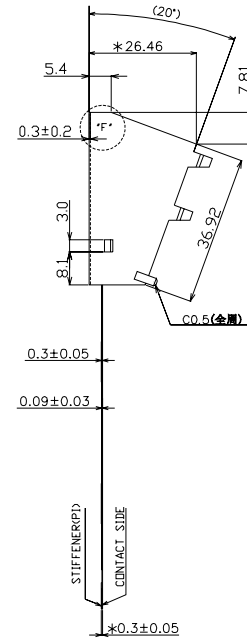


HSF

PIN	NAME
1	A
2	K
3	V0
4	V1
5	V2
6	V3
7	V4
8	CAP2-
9	CAP2+
10	CAP1+
11	CAP1-
12	CAP3+
13	VOUT
14	VSS
15	VDD
16	SDA
17	SCL
18	A0
19	RES
20	CS2

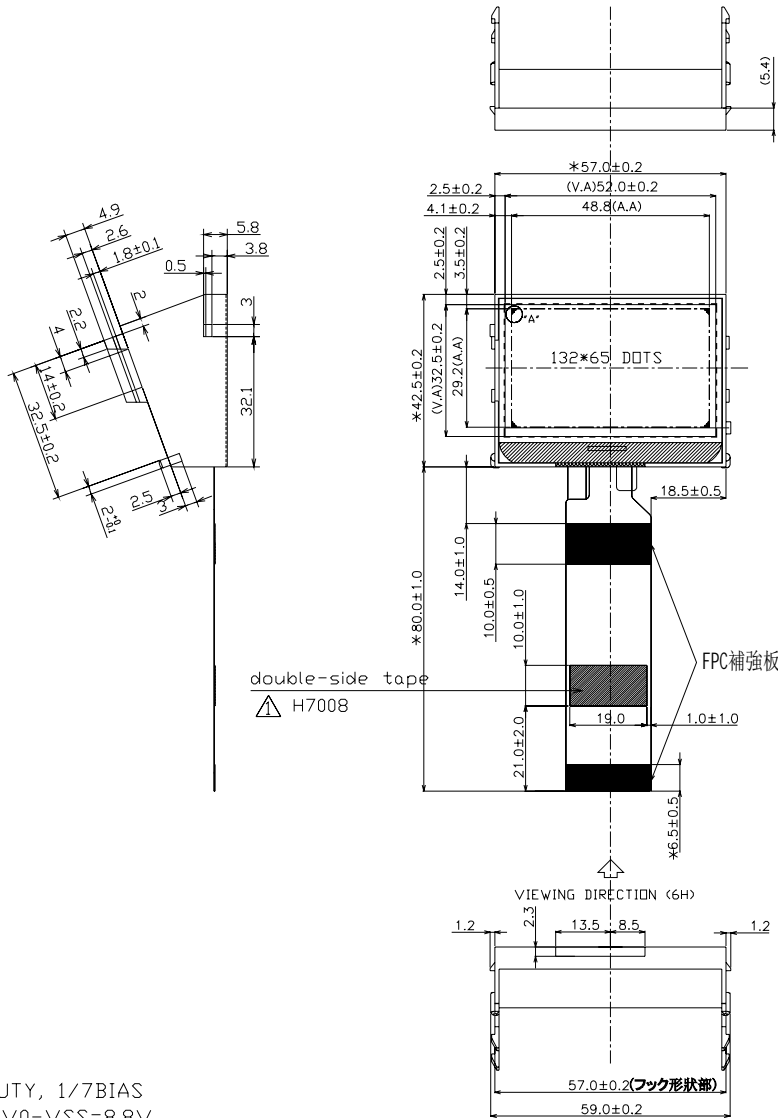

Dotted line is the glass position.
There will be a distance 0.3±0.2mm
between glass and frame.
Glass can not higher than frame.

NOTE:

1. DISPLAY TYPE: FSTN
2. DRIVE METHOD: 1/65DUTY, 1/7BIAS
3. OPERATING VOLTAGE: V0-VSS=8.8V
4. OPERATING TEMP: -10° ~ 60°C
5. STORAGE TEMP: -20° ~ 70°C
6. VIEWING DIRECTION: 6 o'clock
7. POLARIZER MODE: TRANFLECTIVE/POSITIVE
8. CONNECTION: COG+BL+FPC (小片在上, 磨單邊)
9. IC:ST7565P
10. BLACK LIGHT:WHITE
11. DIMENSIONS ARE IN MILLIMETERS AND UNLESS OTHERWISE NOTED ARE ±0.20MM

REVISES		SUN-VIEW TECHNOLOGY CO., LTD						
DATE	CONTENT						PROJECTION	
06	增加重點尺寸標示	CUSTOM						
		DRAWING BY	沈光娥	2018.11.19	ITEM	MD	UNITS	mm
		CHECKED BY			CODE	MD240215007	SCALE	1:1
		APPROVED BY			MODEL	SVG132065JWDC	SHEET	1 OF 3