


HSF

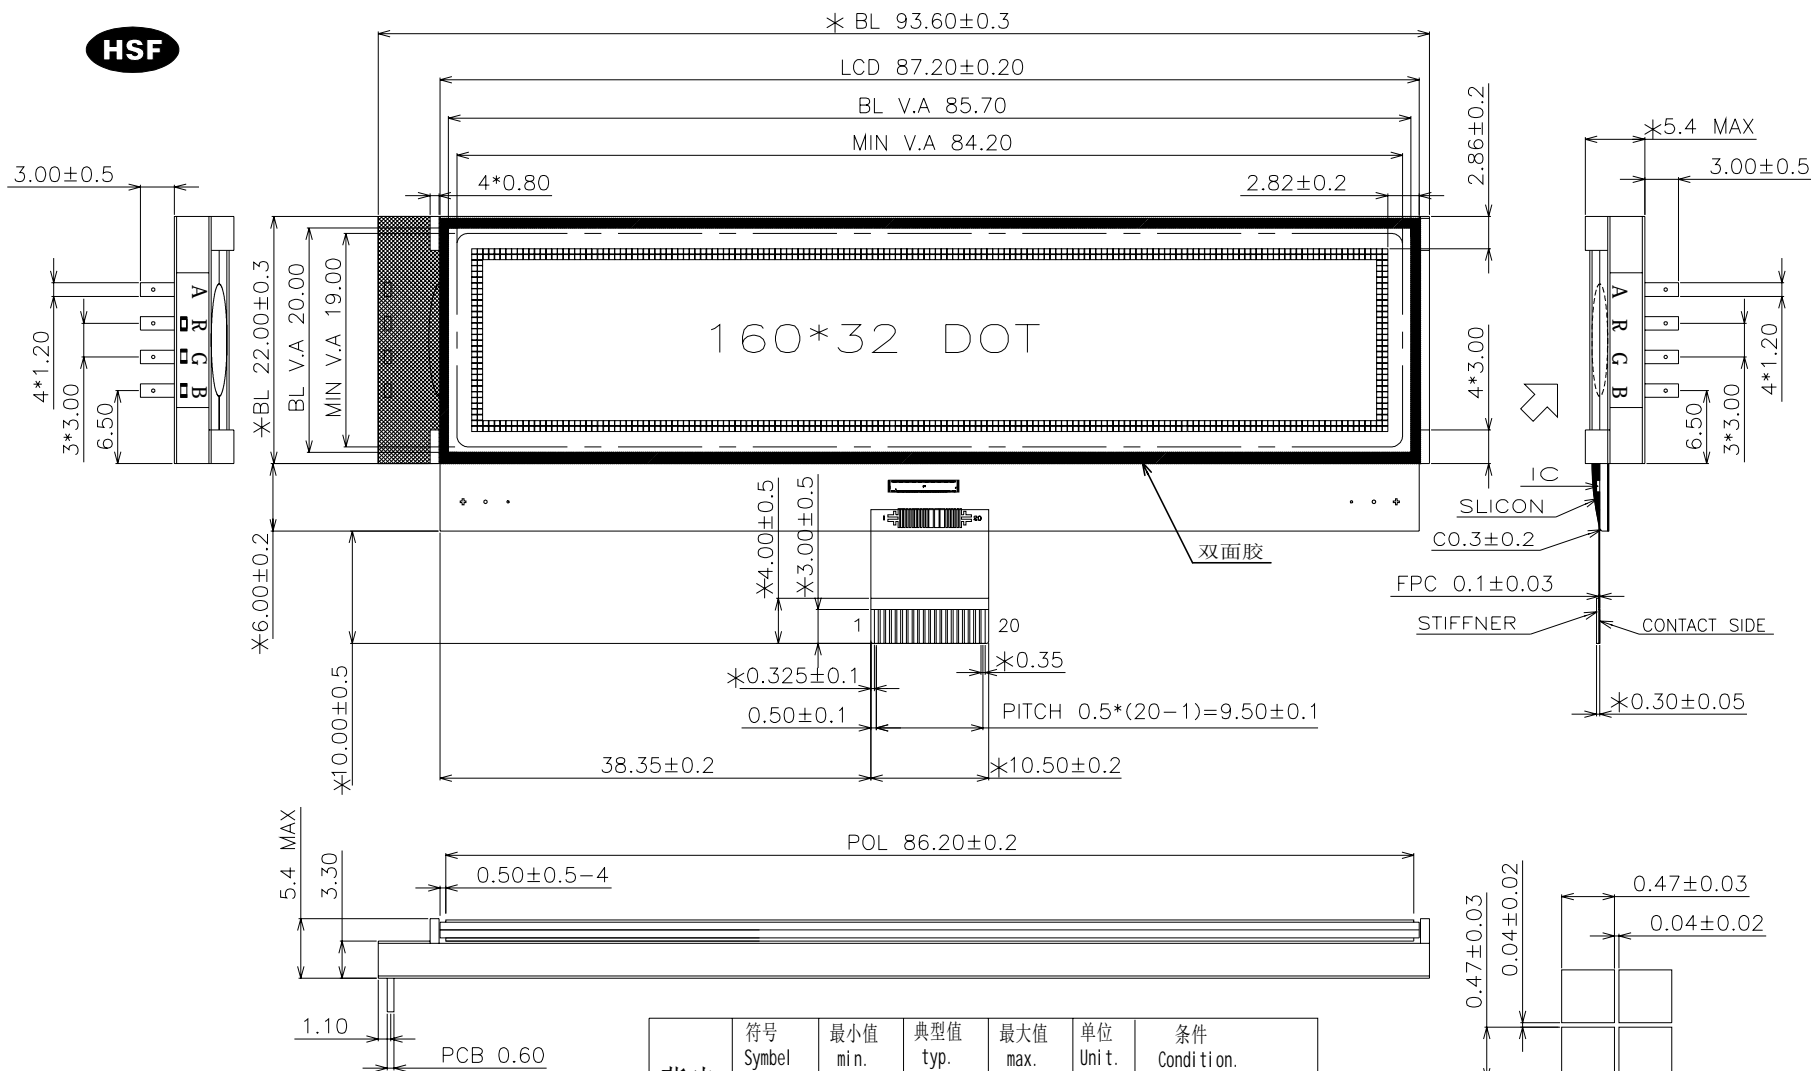

PIN NO.	SYMBOL
1	GND
2	V0
3	V1
4	V2
5	V3
6	V4
7	CAP2N
8	CAP2P
9	CAP1P
10	CAP1N
12	CAP3P
12	VOUT
13	VSS
14	VDD
15	SDA
16	SCLK
17	A0
18	RSTP
19	CS1B
20	GND

背光 參數	符号	最小值	典型值	最大值	单位	条件
	Symbol	min.	typ.	max.	Unit.	Condition.
	Vf(R)	1.9	2.1	2.3	V	If= 20*2 mA
	Vf(G)	2.9	3.1	3.3	V	If= 30*2 mA
	Vf(B)	2.9	3.1	3.3	V	If= 30*2 mA

- NOTES:
1. DISPLAY TYPE:DFSTN.
 2. VIEWING DIRECTION: 6 O'CLOCK.
 3. DRIVE METHOD: 1/32DUTY, 1/7BIAS.
 4. VDD:3.3V VDP:6.0V.
 5. POLARIZER MODE: TRANSMISSIVE/NEGATIVE.
 6. OPERATING TEMP: -20 ~+70°C.
 7. STORAGE TEMP: -30 ~+80°C.
 8. CONNECTION: CDG+FPC 磨边 (小片在上)
 9. BACKLIGHT:RGB IC: RW1092
 10. UNIFORMITY MORE THAN 80%(MIN).
 11. THE NON-SPECIFY TOLERANCE OF DIMENSION IS ±0.2.
 12. RoHS Compliant

REVISES		SUN-VIEW TECHNOLOGY CO.,LTD						
DATE	CONTENT						PROJECTION	
04	增加重點尺寸標示	CUSTOM						
		DRAWING BY	沈光娥	2018.11.15	ITEM	MD	UNITS	mm
		CHECKED BY			CODE		SCALE	1:1
		APPROVED BY			MODEL	SVG160032EFDC	SHEET	1 OF 5