



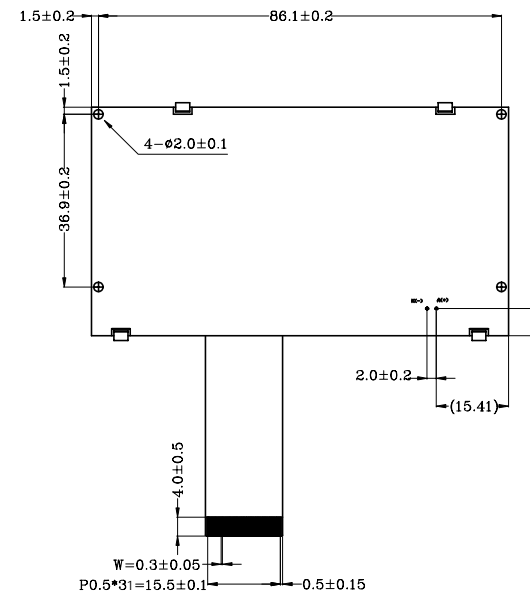


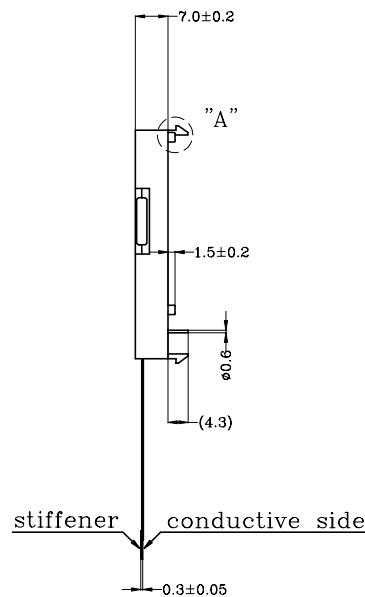

PIN NO.	SYMBOL
1	F-GND
2	/CS
3	/WR
4	/RST
5	RS
6	/RD
7	VSS
8	VCC
9	DB15
10	DB14
11	DB13
12	DB12
13	DB11
14	DB10
15	DB9
16	DB8
17	VPP
18	VM
19	VCI
20	VG
21	C21P
22	C21M
23	C22P
24	C22M
25	C23P
26	C23M
27	C24P
28	C24M
29	VOUT2
30	V0
31	XV0
32	F-GND

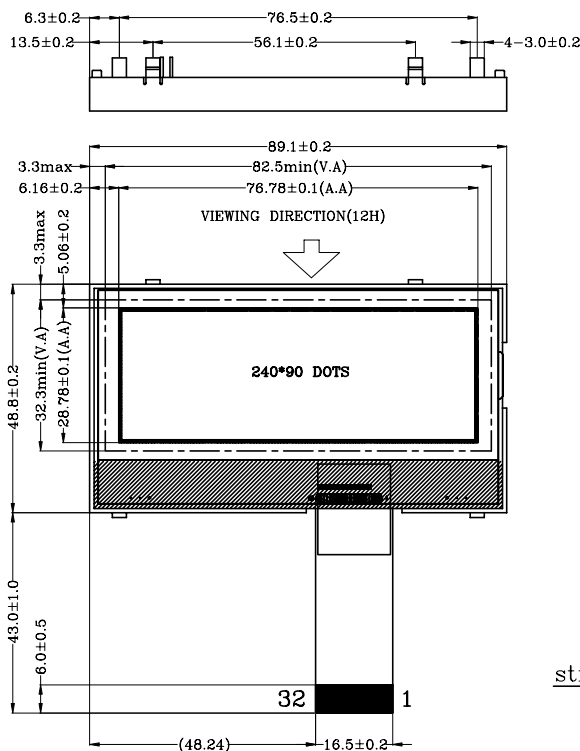

NOTE:

1. DISPLAY TYPE:FSTN
2. DRIVING METHOD: 1/162 DUTY, 1/12 BIAS
3. OPERATING VOLTAGE: VDD=3.3V;V0-VM=14.9V
4. OPERATING TEMP: 0° ~ 50°C
5. STORAGE TEMP: -20° ~ 70°C
6. VIEWING DIRECTION: 12:00
7. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
8. CONNECTION:COG+FPC(小片在上, 磨边)
9. LED BACKLIGHT COLOR:WHITE
10. LCD DRIVE IC:IST3257
11. RoHS COMPLIANT

REVISES		SUN VIEW TECH. CO., LTD						
CONTENT		SVT						
01	1st ISSUE	CUSTOM					PROJECTION	
		DRAWING BY	沈光娥	2015.09.23	ITEM	MD	UNITS	mm
		CHECKED BY			CODE	MD100315001	SCALE	
		APPROVED BY			MODEL	SVG240090BWD	SHEET	1 OF 5