

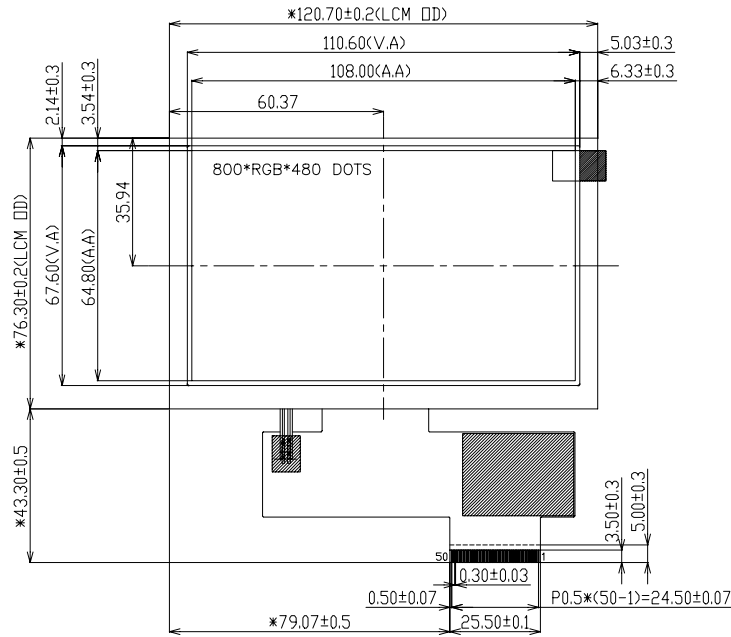


Customer Approved

VER	CHANG CONTENT	DATA
VO	FIRST EDITION	2018.11.22

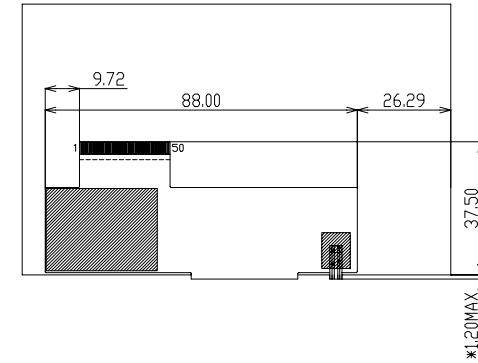

FPC展開出貨
出貨以此圖為準

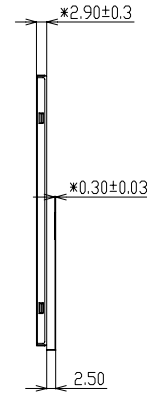

PIN	Symbol
1	NC
2	NC
3	GND
4	DITHB
5	NC
6	NC
7	RESET
8	NC
9	STBYB
10	NC
11	U/D
12	L/R
13	GND
14	DCLK
15	GND
16	R0
17	R1
18	R2
19	R3
20	R4
21	R5
22	R6
23	R7
24	G0
25	G1
26	G2
27	G3
28	G4
29	G5
30	G6
31	G7
32	B0
33	B1
34	B2
35	B3
36	B4
37	B5
38	B6
39	B7
40	HS
41	VS
42	DE
43	MODE
44	DVDD
45	NC
46	GND
47	GND
48	LEDK
49	LEDA
50	GND




Vf=30V(TYP), If=40mA(TYP)

DISPLAY TYPE:	5.0" TFT	DIPALY DRIVER:	ILI5960+ILI6122	PIXEL SIZE:	0.135 X 0.135 mm	產品型號:	SVF050004ANC				
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X20),10串2并	部品型號:	LCM外形圖	核准:			
VIEWING DIRECTION:	6 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C			版本:	VO	單位:	mm	審核:	
DOT MATRIX:	800(RGB)X480 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST	日期:	2018.11.22	比例:	1:1	設計:	謝鳳嬌



旭璟光電科技(惠州)有限公司
SUN VIEW TECH. CO., LTD



UNMARKED TOLERANCE: ±0.20 mm

頁碼:

1 OF 1