

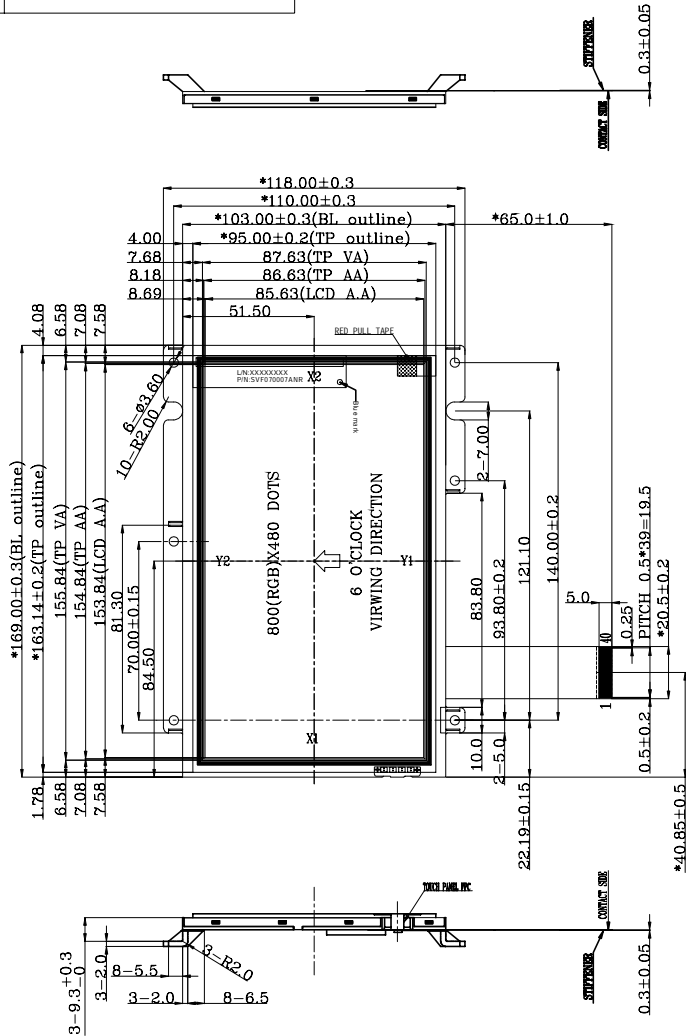



Customer Approved



NOTE:
 1. Gold-plated thickness greater than or equal 0.05, Grade is 2U;
 2. Touch is the use of tempered glass;

VER	CHANG CONTENT	DATA
VO	FIRST EDITION	2017.07.11
V1	Modify Label mark.	2017.07.26
V2	Add Connector Stiffener SIZE	2018.09.11

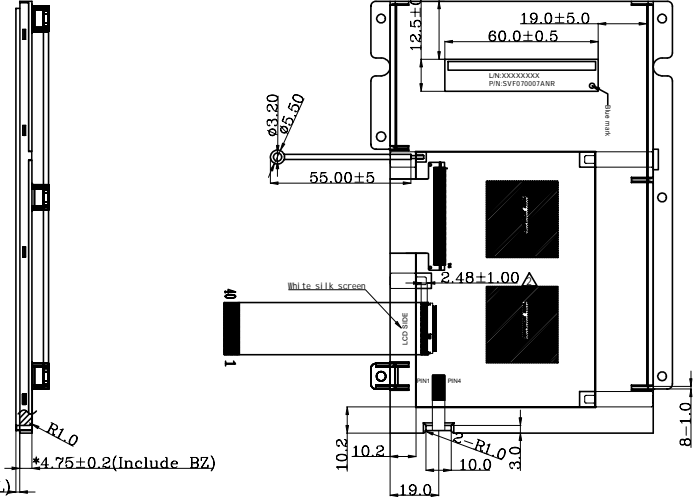


PIN	Symbol
1	K
2	A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSD
33	VSD
34	NC
35	NC
36	NC
37	TP-Y2
38	TP-X2
39	TP-Y1
40	TP-X1

DISPLAY TYPE:	7.0" TFT	DIPALY DRIVER:	HX8264+HX8664	PIXEL PITCH:	0.0641 X 0.1784 mm	產品型號:	SVF070007ANR				
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X30),3串10并	部品型號:	LCM外形圖		核准:		
VIEWING DIRECTION:	6 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C			版本:	V2	單位:	mm	審核:	
DOT MATRIX:	800(RGB)X480 DOTS	STRUCTURE:	LCD+IC+FPC+BL+PCB	MATERIAL NOTE	ROHS REQUEST	日期:	2017.07.11	比例:	1:1	設計:	謝鳳嬌



旭璟光電科技(惠州)有限公司
 SUN VIEW TECH. CO., LTD



UNMARKED TOLERANCE: ±0.20 mm

頁碼: 1 OF 1